



ARANGA *Line* LED

Contemporary lighting technology with stylish simplicity. The ARANGA *Line* LED illuminated mirror brings discreet elegance to the bathroom, thanks to the narrow double strip light in the mirror surface.

A relaxing atmosphere


The indirect, individually switchable strip lights above and below the illuminated mirror create an atmosphere of well-being. The LEDs are available in warm white (3000 K) or neutral white (4000 K).

A wide range of sizes

The ARANGA *Line* range includes a variety of models ranging from 50 to 180 cm wide, so your new illuminated mirror will fit your bathroom perfectly. Smart: the frame can be mounted and rotated by 180°, allowing space for switches and sockets to be included.

Colour



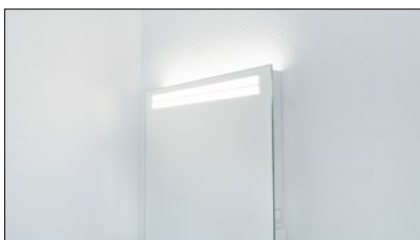



White



Light selection

Light in neutral white (4000 K) or warm white (3000 K). Indirect LED lighting above and below, which can be activated individually.


Properties:

-  **3000 K**
Pleasantly warm, white light ideal for everyday bathroom lighting.
-  **4000 K**
Cool, white light ideal for brightly lighting your bathroom and face.
-  **Indirect light**
Glare-free light radiates upwards or downwards.
-  **Swiss made**
Planning, design and manufacturing takes place entirely at the Swiss factory in Flums.
-  **Direct light**
Direct light shines on the beholder and illuminates the face.
-  **Sustainability**
All mirrors are made of 100% recyclable aluminium.*

* 100% of our aluminium profiles are based on recycled aluminium. This has a used material content of approx. 80%.



ARANGA *Line LED*

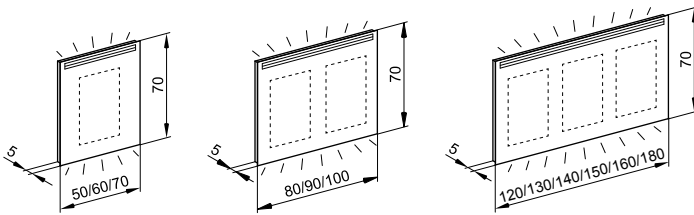

Product details

Cabinet	High quality aluminium profile, anodised or black matt design
Mounting	Surface or recessed mounting, maximum installation depth 8 cm
Doors	Hinged doors with soft door closure, robust hinge technology
Mirrors	Out- and inside with light bands above
Glass shelves	Continuously adjustable, including safety shelf supports
Sockets	Socket right above
Lighting	LED dimmable, lightings above / below switchable individually, continuously adjustable from 2000 – 6500 K Button for functions inside on the side panel
Accessories	Accessory box and magnifying mirror, handles enclosed for self mounting (anodised version only)
Protection class	IP44
Energy efficiency	Contains light sources of class A++ (new scale: E)

Other features and options

- Designation L/R refers to the door hinge position
- 1-door models 50/1 and 60/1: Hinge left or right (L/R)
- 3-doors models, door widths:
100/3: 30/40/30 cm | 150/3: 60/30/60 cm
150/3/GT: 50/50/50 cm
- Intermediate wall: From the width 80 with 1, respectively 2 intermediate walls
- Models in black matt with mirrored back wall