



LOW LINE BASIC LED OR FL

While *LOW Line LED/FL* is already reduced to the essentials, *LOW Line Basic LED/FL* goes one step further – or one step back, depending on your perspective.

Extravagances are foregone – ideal for large projects

Everything remains the same as with the standard version: the simple cubic lighting, the brilliant double-mirror doors, the premium housing made of aluminium profiles.

However, *LOW Line Basic LED/FL* does not afford any extravagances: dimmable light is dispensed with and one luminaire above the large mirror is sufficient. This makes *LOW Line Basic LED/FL* the ideal mirror cabinet range for large projects and residential buildings in today's rental standard. The large-format mirror surface optically enlarges any guest bathroom, so that it cleverly contributes to your sense of well-being even in small rooms.

There are no compromises in terms of quality: *LOW Line Basic LED/FL* is also manufactured in the proven Schneider quality in Switzerland.

Colour



White



Glass shelves

Continuously adjustable glass shelves.



Socket

Socket on the top right.

Properties:



3000 K

Pleasantly warm, white light ideal for everyday bathroom lighting.



4000 K

Cool, white light ideal for brightly lighting your bathroom and face.



Continuously adjustable glass shelves

The beloved Schneider system featuring continuously adjustable glass shelves.



Recessed mounting

The mirror cabinet can be installed in the wall for less protrusion.



Sustainability

All cabinets are made of 100% recyclable aluminium.



Direct light

Direct light shines on the beholder and illuminates the face.




Installation frame

INSTALLATION FRAME
universal for flush mounting.



LOW LINE BASIC LED OR FL

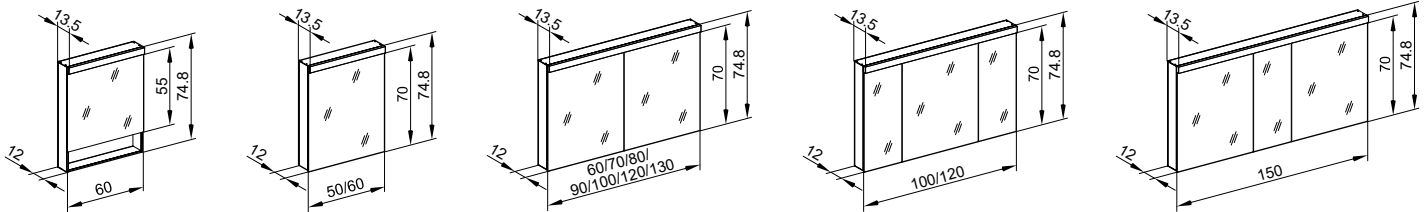

Product details

Cabinet	High quality aluminium profile (60/1/F with open shelf below), white design
Mounting	Surface or recessed mounting, maximum installation depth 10 cm
Doors	Hinged doors with soft door closure, robust hinge technology
Mirrors	Out- and inside
Glass shelves	Continuously adjustable, including safety shelf supports
Sockets	Socket right above
Lighting	LED 4000 K or 3000 K. Fluorescent tubes 840 with EB, switch left above
Protection class	IP44
Energy efficiency	Contains LED light sources of class A++ (new scale: E) Contains FL light sources of class A (new scale: G)

Other features and options

- 1-door models 50/1 and 60/1: Hinge reversible left or right
- 3-doors models, door widths:
100/3: 30/40/30 cm | 120/3: 30/60/30 cm | 150/3: 60/30/60 cm
- Intermediate wall: From the width 100/3 with 1 intermediate wall
- Accessories: The accessory box Art.No. 139.001.01.00 GBP 40.00 excl. VAT, the magnifying mirror Art.No. 139.002.01.00 GBP 23.00 excl. VAT and the door handle TG 5 Art.No. 139.004.01.54 GBP 14.00 excl. VAT can be purchased individually