

LOW Line Basic LED

While LOW Line LED is already reduced to the essentials, LOW Line Basic LED goes one step further - or one step back, depending on your perspective.

Extravagances are foregone - ideal for large projects

Everything remains the same as with the standard version: the simple cubic lighting, the brilliant double-mirror doors, the premium housing made of aluminium profiles.

However, LOW Line Basic LED does not afford any extravagances: dimmable light is dispensed with and one luminaire above the large mirror is sufficient. This makes LOW Line Basic LED the ideal mirror cabinet range for large projects and residential buildings in today's rental standard. The large-format mirror surface optically enlarges any guest bathroom, so that it cleverly contributes to your sense of well-being even in small rooms. Available in cabinet depths of 12 cm and 15 cm.

There are no compromises in terms of quality: LOW Line Basic LED is also manufactured in the proven Schneider quality in Switzerland.

Colour

White



Glass shelves

Continuously adjustable glass shelves.



Socket

Properties:



Pleasantly warm, white light ideal for everyday bathroom lighting.



4000 K

Cool, white light ideal for brightly lighting your bathroom and face.



Swiss made

Planning, design and manufacturing takes place entirely at the Swiss factory in Flums.



Continuously adjustable glass shelves

The beloved Schneider system featuring continuously adjustable glass shelves.



Recessed mounting

The mirror cabinet can be installed in the wall for less protrusion.



Sustainability

All cabinets are made of 100% recyclable aluminium.*




Direct light

Direct light shines on the beholder and illuminates the face.



Installation frame


INSTALLATION FRAME universal for flush mounting.





LOW Line Basic LED

12cm:

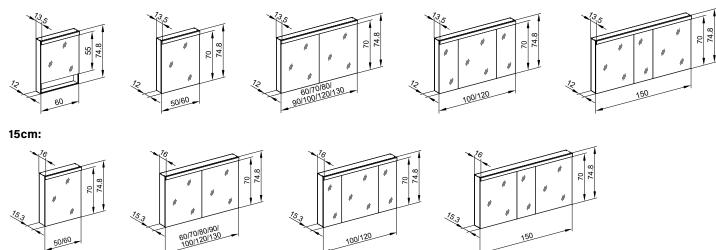

Product details		Other features and options
Cabinet	High quality aluminium profile (60/1/F with open shelf below), white design	– 1-door models 50/1 and 60/1: Hinge reversible left or right
		– Toggle switch top left, changeable to the right
Mounting	Surface or recessed mounting, maximum installation depth 10 cm / 13 cm	- 3-doors models, door widths: 100/3: 30/40/30 cm 120/3: 30/60/30 cm 150/3: 60/30/60 cm - Intermediate wall: From the width 100/3 with 1 intermediate wall
Doors	Hinged doors with soft door closure, robust hinge technology	
Mirrors	Out- and inside	 Accessories: The magnifying mirror Art. No. 139.002.01.00 and the door handle TG 5 Art. No. 139.004.01.54 can be purchased individually
Glass shelves	Continuously adjustable, including safety shelf supports	
Sockets	Socket right above, exchangeable to the left	Special versions:
Lighting	Above, LED 4000 K or 3000 K. Fluorescent tubes 840 with EB, switch left above	- Additional socket above left
		- Additional socket at bottom of side profile or intermediate wall
Protection class	IP44	
Energy efficiency	Contains LED light sources of class A++ (new scale: 4000K = D, 3000K = E) Contains FL light sources of class A (new scale: G)	