



O-Line LED

O-Line LED is a multi-talent. The mirror cabinet is available in 14 different versions with widths of 50 to 150 cm and one, two or three pivot doors with dampers.

A typical Schneider mirror cabinet

As is usually the case with Schneider, O-Line LED is also made of premium aluminium profiles, perfectly combining quality, aesthetics and price consciousness. Its external design features include the large mirror surface and the continuous lateral profile band with the characteristic fine notches.

Bespoke lighting

Depending on the bathroom size, the premium LEDs, available in warm white (3000 K) or neutral white (4000 K), are suitable for illuminating the entire room. This means that O-Line LED also saves the costs for installation and operation of a separate ceiling light. The mirror cabinet is also available with indirect lighting at the bottom that can be separately activated, thus creating a truly relaxing atmosphere.

Installation frame

Can be installed in a flush-mounted version with the universal installation frame. (For 12 cm version with only direct light above).

Colour

White



Optional indirect light









below the mirror, which can be activated individually.



Socket


Socket on the top right.

Properties:

- 
3000 K
Pleasantly warm, white light ideal for everyday bathroom lighting.
- 
4000 K
Cool, white light ideal for brightly lighting your bathroom and face.
- 
Indirect light
Glare-free light radiates upwards or downwards.
- 
Continuously adjustable glass shelves
The beloved Schneider system featuring continuously adjustable glass shelves.
- 
Recessed mounting
The mirror cabinet can be installed in the wall for less protrusion.
- 
Sustainability
All cabinets are made of 100% recyclable aluminium.
- 
Direct light
Direct light shines on the beholder and illuminates the face.
- 
Installation frame
INSTALLATION FRAME
universal for flush mounting



O-Line LED

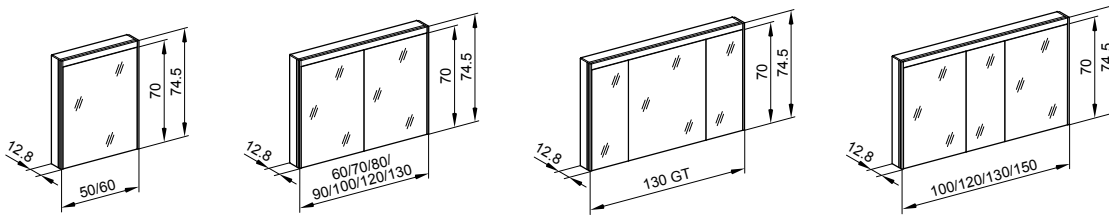

Product details

Cabinet	High quality aluminium profile, white design
Mounting	Surface or recessed mounting, Maximum installation depth 10 cm, Models +LED below surface mounting only
Doors	Hinged doors with soft door closure, robust hinge technology
Mirrors	Out- and inside
Glass shelves	Continuously adjustable, including safety shelf supports
Sockets	Socket right above
Lighting	LED 4000 K, 3000 K optionally available with expansion code 01, prices remain the same. Switch left above Models +LED below with additional lighting below indirect and double switch outside right below. Lightings above / below switchable individually
Protection class	IP44
Energy efficiency	Contains light sources of class A++ (new scale: E)

Other features and options

- 1-door models 50/1 and 60/1: Hinge reversible left or right
- 3-doors models, door widths:
100/3: 30/40/30 cm | 120/3: 30/60/30 cm | 130/3/GT: 35/60/35 cm
130/3: 50/30/50 cm | 150/3: 60/30/60 cm
- Intermediate wall: From the width 90 with 1, respectively 2 intermediate walls. 100/3 only 1 intermediate wall left
- Accessories: The accessory box Art.No. 139.001.01.00 GBP 38.00 excl. VAT, the magnifying mirror Art.No. 139.002.01.00 GBP 22.00 excl. VAT and the door handle TG 5 Art.No. 139.004.01.54 GBP 13.00 excl. VAT can be purchased individually