



OBJECT *Line Comfort LED*

The new OBJECT *Line Comfort LED* is the perfect mirror cabinet for large projects: slimline, linear, straightforward and adaptable.

Made from the typical robust aluminium always used at Schneider. Slimline also means: the OBJECT *Line Comfort LED* radiates a high-quality, cabinet-width LED light from the upper edge of the cabinet only – with a choice of warm white (3000 K) or neutral white (4000 K).

Interior door

The OBJECT *Line Comfort LED* embraces Schneider's decades-long tradition of mirror cabinet design: It features an interior mirrored door, elegantly bordered by the narrow aluminium frame.

- Cabinet widths of 50 cm to 150 cm
- Continuously adjustable glass shelves
- On-wall and flush mounting without any adjustments

Colour

White



Glass shelves

Continuously adjustable glass shelves.



Socket

Socket on the top right.

Properties:



3000 K

Pleasantly warm, white light ideal for everyday bathroom lighting.



4000 K

Cool, white light ideal for brightly lighting your bathroom and face.



Continuously adjustable glass shelves

The beloved Schneider system featuring continuously adjustable glass shelves.



Recessed mounting

The mirror cabinet can be installed in the wall for less protrusion.



Sustainability

All cabinets are made of 100% recyclable aluminium.*



Direct light

Direct light shines on the beholder and illuminates the face.




Swiss made

Planning, design and manufacturing takes place entirely at the Swiss factory in Flums.

* 100% of our aluminium profiles are based on recycled aluminium. This has a used material content of approx. 80%.



OBJECT *Line Comfort LED*

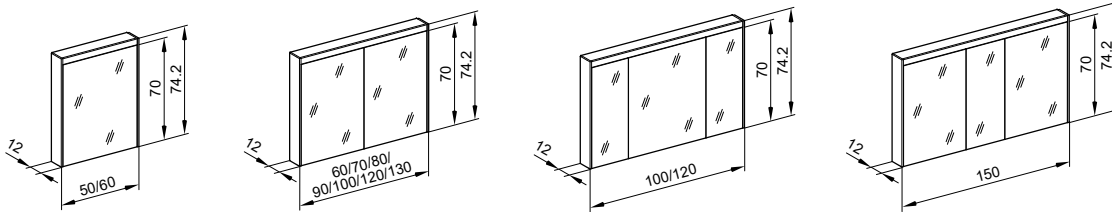

Product details

Cabinet	High quality aluminium profile, white design
Mounting	Surface or recessed mounting, maximum installation depth 11 cm
Doors	Hinged doors with soft door closure, robust hinge technology. Recessed mirror doors.
Mirrors	Out- and inside
Glass shelves	Continuously adjustable, including safety shelf supports
Sockets	Socket right above, exchangeable to the left
Lighting	LED 4000 K or 3000 K.
Protection class	IP44
Energy efficiency	Contains LED light sources of class A++ (new scale: 4000K = D, 3000K = E)

Other features and options

- 1-door models 50/1 and 60/1: Hinge reversible left or right
- Toggle switch top left, changeable to the right
- 3-doors models, door widths:
100/3: 30/40/30 cm | 120/3: 30/60/30 cm | 150/3: 60/30/60 cm
- Intermediate wall: From the width 100/3 with 1 intermediate wall

Special versions:

- Additional socket above left
- Additional socket at bottom of side profile or intermediate wall